



AVAILABLE THROUGH:

**Sure-Response**  
We Hear You!

Tel: 888.530.5668

1075 North Reed Station Road  
Carbondale, IL 62902

[www.sure-response.com](http://www.sure-response.com)

**HYT**


Two-way Radio

# TC-508

Professional  
Two-way Radio  
Affordable & Reliable



- Tough & Light-weight
- Robust & Reliable
- Longer Battery Life
- Enhanced Voice Quality

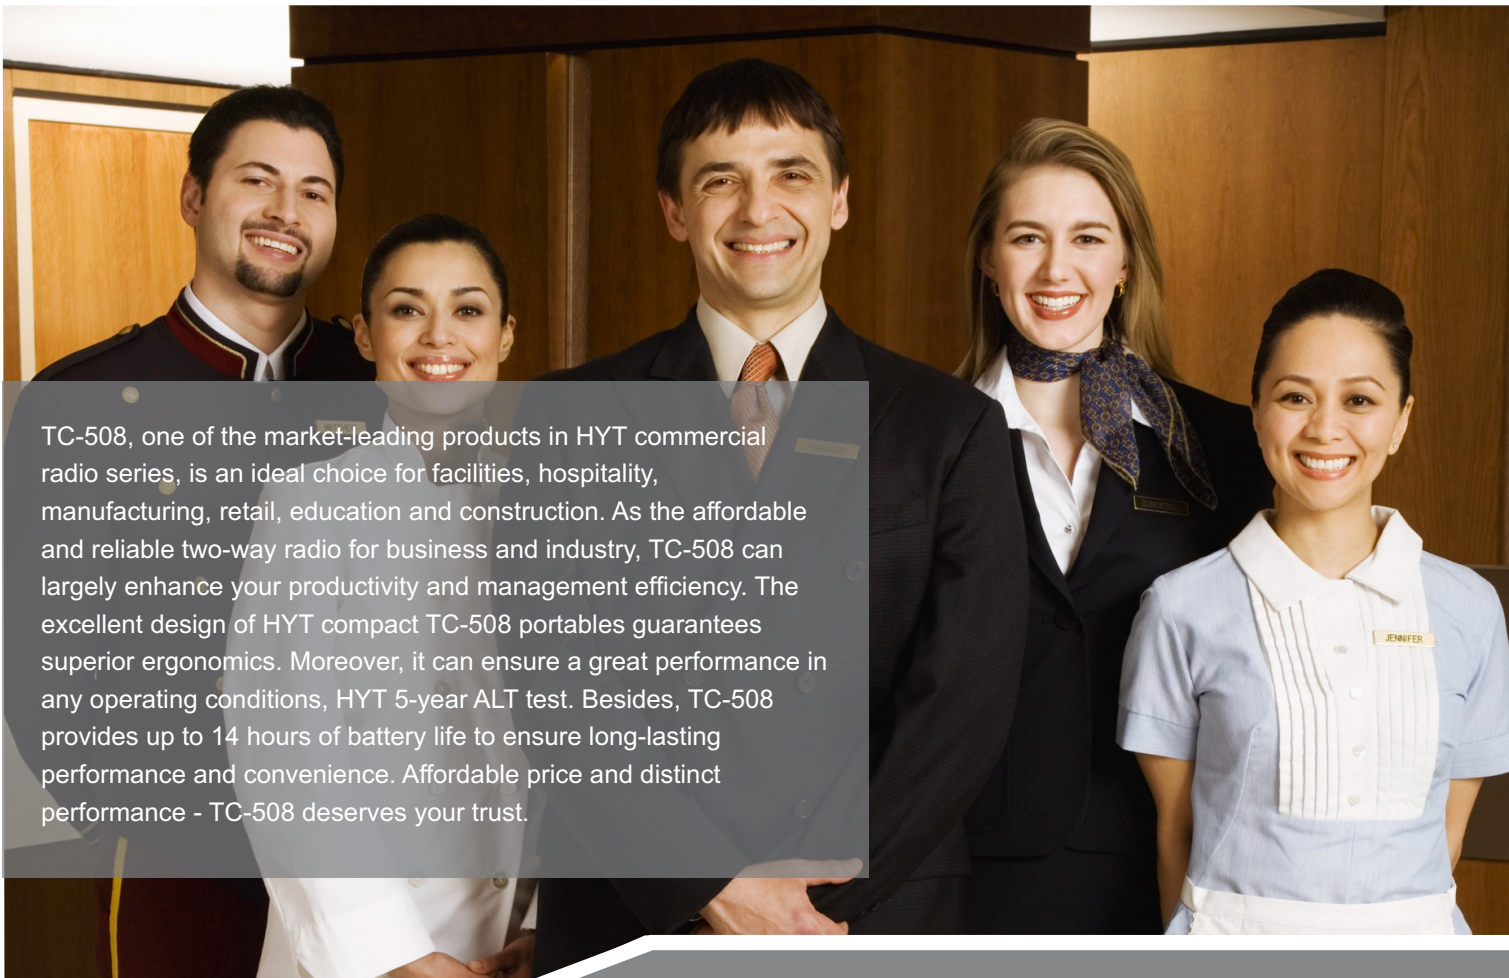

TC-508, one of the market-leading products in HYT commercial radio series, is an ideal choice for facilities, hospitality, manufacturing, retail, education and construction. As the affordable and reliable two-way radio for business and industry, TC-508 can largely enhance your productivity and management efficiency. The excellent design of HYT compact TC-508 portables guarantees superior ergonomics. Moreover, it can ensure a great performance in any operating conditions, HYT 5-year ALT test. Besides, TC-508 provides up to 14 hours of battery life to ensure long-lasting performance and convenience. Affordable price and distinct performance - TC-508 deserves your trust.

# TC-508

## Leading Features

### ■ Tough & Light-weight

TC-508 has a light-weight but exceptionally strong body, allowing it to be carried about easily and to survive harsh conditions.

### ■ Robust & Reliable

TC-508 is built to survive the hard knocks, drops and some tough environments of its users. It meets or exceeds the HYT 5-year ALT test.

## Professional Two-way Radio



AVAILABLE THROUGH:

**Sure-Response**  
We Hear You!

Tel: 888.530.5668  
1075 North Reed Station Road  
Carbondale, IL 62902  
[www.sure-response.com](http://www.sure-response.com)

### ■ Longer Battery Life

TC-508 is equipped with a 1650mAh battery that enables you to transmit and receive, on a 5-5-90 basis, for up to 14 hours.

### ■ Enhanced Voice Quality

TC-508 employs advanced voice technologies to better the sound quality during your communication.



## Main Functions

High/Low Power Switch

Wide/Narrow Band Switch

Monitor

CTCSS/CDCSS and Squelch Tail Elimination

Channel Scan

Battery Save

Low Battery Alert

Busy Channel Lockout

Time-out Timer (TOT)

PC Programmable

Wired Clone

Squelch Levels Selectable



AVAILABLE THROUGH:

**Sure-Response**  
We Hear You!

Tel: 888.530.5668  
1075 North Reed Station Road  
Carbondale, IL 62902  
[www.sure-response.com](http://www.sure-response.com)

## Recommended Applications

- Hospitality
- Education
- Manufacturing
- Construction
- Retail
- Security

## Accessories

Standard Accessories

Li-Ion Battery  
Belt Clip

Rapid-Rate Charger (for Li-Ion Battery)  
Strap

Power Adapter  
Antenna

Optional Accessories




Li-Ion Battery (1300mAh)  
BL1301



Vehicle Power Adapter  
CHV09




Six-unit Switching Power  
PS7002




Remote Speaker  
Microphone SM08M3



Earbud with on-MIC  
PTT & VOX ESM12



D-earset with in-Line  
MIC & VOX EHM15



D-earset with Boom  
MIC & VOX EHM16



Earpiece with on-MIC  
PTT & Transparent  
Acoustic Tube EAN12



Receive-Only Earpiece with  
Transparent Acoustic Tube  
(for use with remote speaker  
microphone) ESS08



Nylon Carrying Case  
(not swivel)(black)  
NCN001



Receive-Only Earpiece  
(for use with remote speaker  
microphone) ESS07

**Note:** Pictures above are for reference only and may vary from actual product.

## General

Frequency Range(MHz)	VHF: 146-174 UHF: 450-470
Channel Capacity	16
Channel Spacing(KHz)	25 /12.5
Operating Voltage(V)	7.4
Battery	1650mAh (Li-Ion Battery)
Battery Life (5-5-90 Duty Cycle)	14 hours
Frequency Stability(ppm)	± 2.5
Operating Temperature(°C)	-20~+65
Antenna Impedance(Ω)	50
Dimensions (H×W×D)(with battery, without antenna)(mm)	113×54×35
Weight (with antenna & battery)(g)	280

## Transmitter

Power Output	5W/2W(VHF) 4W/2W(UHF)
Modulation	16K0F3E/11K0F3E
Spurious and Harmonics	≤-26dBm (<1G)
FM Noise	40/35dB
Audio Distortion	≤5 %
Modulation Limiting	≤5KHz (25KHz) ≤2.5KHz (12.5KHz)
Audio Response	≤+1~-3dB (6dB/oct pre-emphasized, 300-3000Hz)

## Receiver

Sensitivity	≤0.251uV/0.282uV
Adjacent Channel Selectivity	65dB/55dB
Intermodulation	60dB
Spurious Response Rejection	65dB
S/N	45dB/40dB
Rated Audio Power Output	0.5W (Speaker impedance: 16 Ohm)
Rated Audio Distortion	≤5% (0.5W)
Conducted Spurious Emission	-57dBm < 1GHz    -47dBm > 1GHz

All Specifications are tested according to applicable standards, and subject to change without notice due to continuous development.



## Hytera Communications Corporation Limited

Address: HYT Tower, Hi-Tech Industrial Park North, Beihuan Rd.,  
Nanshan District, Shenzhen, China

Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057

Http: //www.hytera.com Stock Code: 002583.SZ

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Co., Ltd. © 2012 Hytera Co., Ltd. All Rights Reserved.



AVAILABLE THROUGH:

**Sure-Response**  
We Hear You!

Tel: 888.530.5668  
1075 North Reed Station Road  
Carbondale, IL 62902

[www.sure-response.com](http://www.sure-response.com)